

超寬帶功分器

Ultra-wideband power splitter



Tone Spread
Solutions for Wireless Signal

136-2500MHz(N-F)

TS-PS-1325-2/3/4CNI


Telecommunication Technology & Engineering Accessories

Rev.V1.0

規格(Technical & Mechanical Specifications)

Frequency Range(MHz)	136-2500		
Type	2 – Way	3 – Way	4 – Way
Splitting Loss (dB)	3.0 dB	4.8 dB	6.0 dB
Insertion Loss (dB)	≤1.0	≤1.8	≤2.0
VSWR	≤1.5		
PIM (dBc)	≤130		
Power(W)	100W		
Impedance(Ω)	50		
Environmental Specifications			
Operating Temperature(°C)	-20° C to +50° C		
Size(mm) ±10%	900×25×25	1000×25×25	1100×25×25
Relative humidity	≤95%		
Applications	Indoor IP55		
Mechanical Data			
RF Connector	N-F		
Colour	Black or Custom		

Product Drawing:

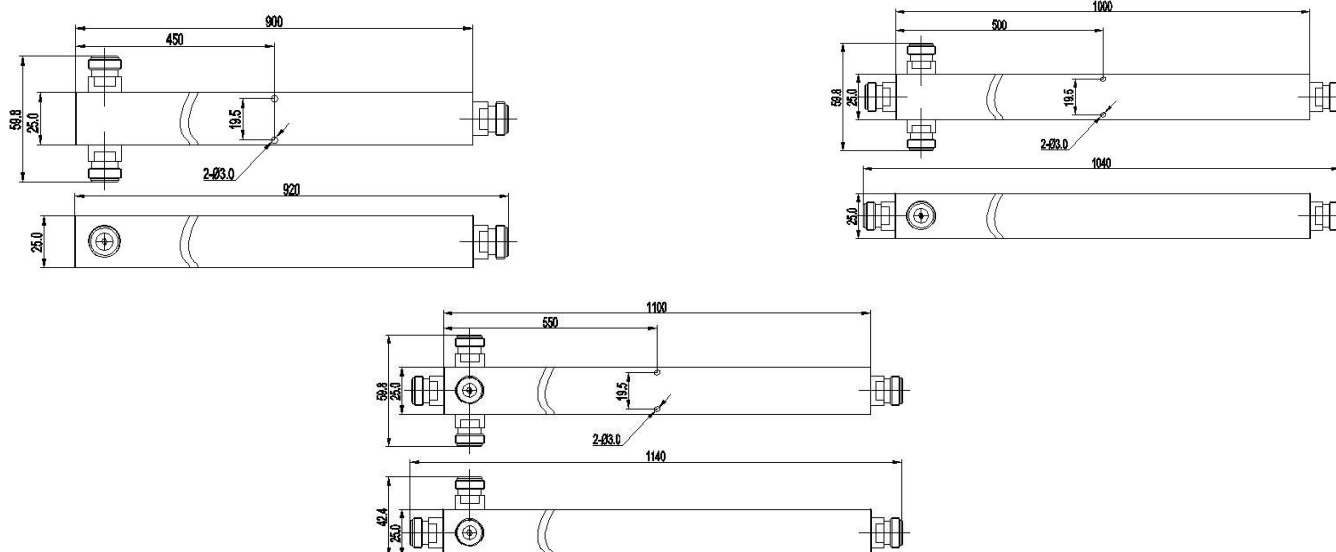

Note: The picture is only for reference, please make the object as the standard

All specifications are subject to change without notice.

©2021 TONE SPREAD TECHNOLOGY CO., LTD. All Rights Reserved.

Website <http://www.tspd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan

TEL:+886-2-28828979

FAX:+886-2-28829196

E-mail: sales@tspd.com.tw