
VHF Power Splitter

Tone Spread
Solutions for Wireless Signal

Telecommunication Technology & Engineering Accessories Rev.V1.0

General Description

50W VHF Power Splitter (136-174MHz, SMA Female)

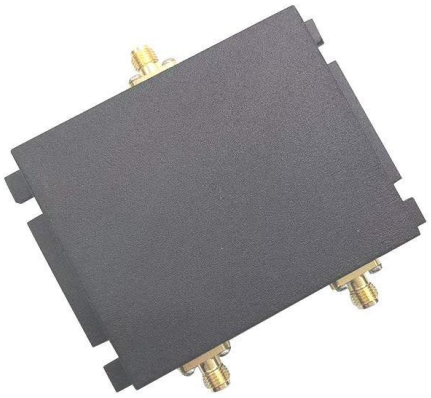


Features & Benefits

- Low Frequency Band 136-174MHz
- Low Insertion Loss
- Low VSWR
- Indoor Using IP60
- Available with Type N, 7/16 DIN or 4.3/10 Connectors

Electrical & Mechanical Specifications

Model No.	TSW-2WPS-VHF-SMAF
Split Chanel	2-way
Split Loss(dB)	3.0
Insertion Loss(dB)	≤0.5
Isolation(dB)	≧20
Freq(MHz)	136-174MHz
VSWR	≤1.30
Power Rating(W)	50W (average Per Port)
Impedance	50 ohm
Connector	SMA Female
Color	Black
Operating Temperature(℃)	-30~+65
Weight(kg)	0.18

Mechanical Drawing

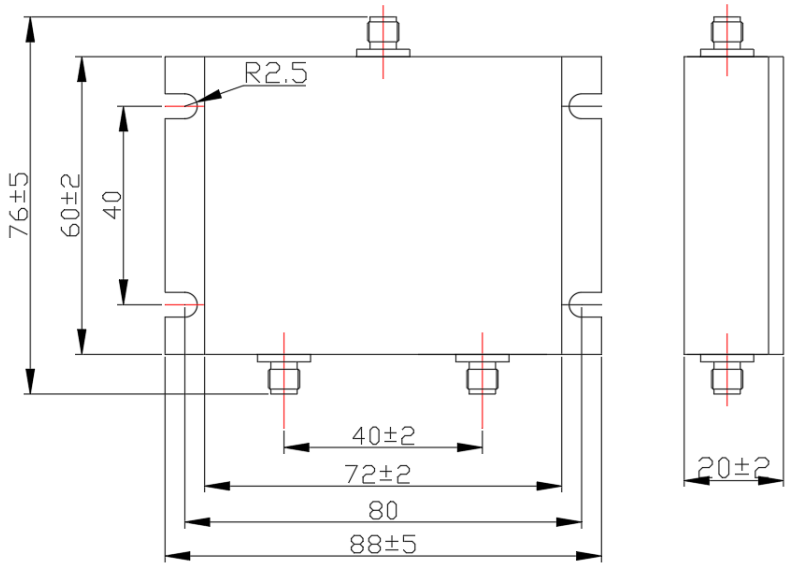

Dimensions in mm

All specifications are subject to change without notice. ©2019 TONE SPREAD TECHNOLOGY CO., LTD. All Rights Reserved. Website https://www.tspd.com.tw

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan TEL:+886-2-28828979 FAX:+886-2-28829196 E-mail: sales@tspd.com.tw