

2-8GHz 2Way Power Splitter

PS-28G-35-2CNI



Tone Spread
Solutions for Wireless Signal


Telecommunication Technology & Engineering Accessories

Rev.V1.0

N Type 2 Way Power Splitter (2-8GHz):

| Item | PS-28G-35-2CNI | Product Picture |
|------------------------------------|--|-----------------|
| Frequency Range (GHz) | 2-8 | |
| Amplitude Balance(dB) | $\leq \pm 0.3$ dB | |
| VSWR | ≤ 1.4 | |
| Insertion Loss (dB) | ≤ 3.8 dB | |
| Phase Balance(°) | $\leq \pm 3$ | |
| Isolation(dB) | ≥ 20 | |
| Power (W) | As Splitter:35,Avg. As Combiner:2,Avg | |
| Impedance (Ω) | 50 | |
| Temperature Range ($^{\circ}$ C) | -20~+60 | |
| Size(mm) | 80x32x13 | |
| Connector | N-Female | |
| Environmental | Indoor , RoHS Compliant | |

Product Drawing:

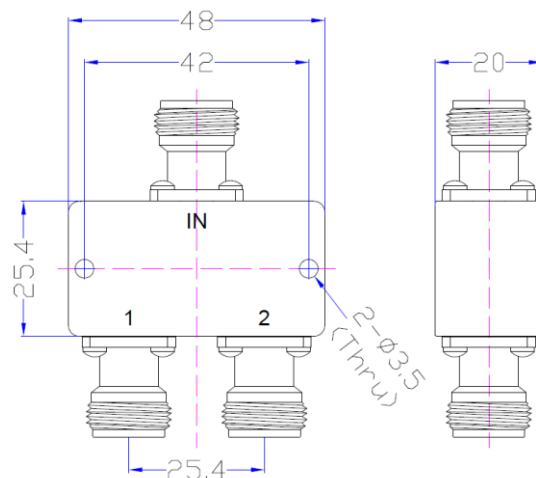

Note: The picture is only for reference, please make the object as the standard

All specifications are subject to change without notice.

©2021 TONE SPREAD TECHNOLOGY CO., LTD. All Rights Reserved.

Website <http://www.tspd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan

TEL:+886-2-28828979

FAX:+886-2-28829196

E-mail: sales@tspd.com.tw